


Rinnai

JK Series


455-475W Solar Panel

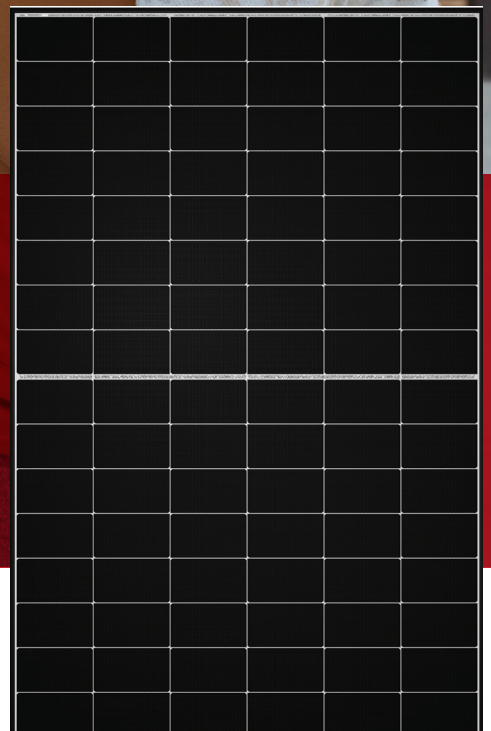

Features and Benefits

Designed for Australian Conditions

The Rinnai JK series is designed to deliver dependable solar performance for modern Australian homes. Featuring advanced N-type half-cell technology and a durable dual-glass construction, it provides strong power output, consistent efficiency and long-term durability. The compact, lightweight format makes installation straightforward, while the refined black frame design ensures an attractive fit for a wide range of residential rooftops.

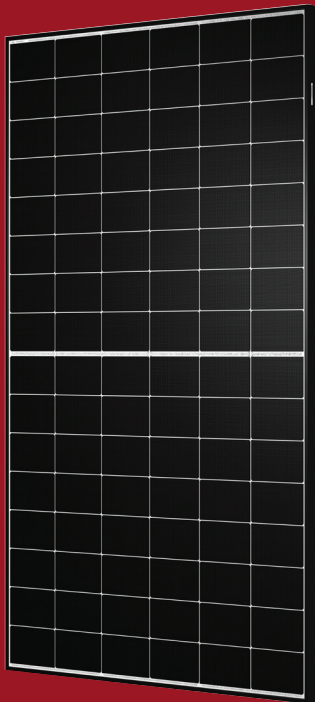

Built for Australian Conditions

Cyclone-tested for high-wind regions and engineered with advanced hail resistance to withstand 45 mm hailstones at 110 km/h. Finished with a Level 8 Salt Mist rating for long-term durability in coastal environments.



N-Type Technology

Next-generation cell technology delivers higher efficiency, strong low-light performance and reliable output in Australia's sunny climate.



Dual-Glass Strength

A robust 2.0 mm dual-glass design increases durability and moisture resistance, supporting consistent long-term performance in humid and coastal areas.



Positive Power Output

Every panel is guaranteed to meet or exceed its rated capacity, providing dependable real-world energy production.





Long-Term Assurance

Backed by a 25-year product warranty and a 30-year performance warranty for lasting confidence and efficiency.

Technical Information

RINNAI - Module type			RINNAI-JK-455	RINNAI-JK-460	RINNAI-JK-465	RINNAI-JK-470	RINNAI-JK-475
Electrical Characters (STC) ^(A)	Maximum Power	Pmax (W)	455	460	465	470	475
	Open Circuit Voltage	Voc (V)	36.10	36.25	36.40	36.55	36.70
	Short Circuit Current	Isc (A)	15.85	15.89	15.92	15.95	15.97
	Voltage at Maximum Power	Vmp (V)	30.06	30.31	30.56	30.80	31.05
	Current at Maximum Power	Imp (A)	15.14	15.18	15.22	15.26	15.30
	Module Efficiency	(%)	22.77	23.02	23.27	23.52	23.77
Temperature Rating	Temperature Coefficient	Pmax (%/°C)	-0.28				
	Temperature Coefficient	Voc (%/°C)	-0.24				
	Temperature Coefficient	Isc (%/°C)	0.046				
Operating Parameters	Operating Temperature	°C	-40~+70				
	Maximum System Voltage		1500V DC				
	Maximum Series Fuse Rating	A	30				
	Power Selection Tolerance	%	0~+3				
	Fire Class Rating	-	Class C				
	T ₉₅	-	70°C				
Mechanical Parameters	Cell Type	-	N Type Monocrystalline Cell				
	Cell Orientation	-	96 (6x16)				
	Dimension (L × W × H)	mm	1762±2 × 1134±2 × 30				
	Weight	kg	22.8				
	Front Glass	-	2.0mm AR Coated semi tempered glass				
	Rear Glass	-	2.0mm semi tempered glass				
	Frame	-	Anodised aluminium alloy black frame				
	Junction Box	-	IP68, 3 Diodes				
	Cable	mm ²	4				
	Cable Length	mm	1200				
	Connector	-	Stäubli - PV-KS(B)T4-EVO2A/xy				
	Test Load	Pa	-2400 / +5400				
	Per Pallet	-	36 Pieces				
	Packaging	-	936 Pieces per 40' HC				

^(A)STC: Irradiance 1000W/m², Cell Temperature 25°C, Air Mass 1.5, Power Measurement Tolerance: ±3%, Voc and Isc Measurement Tolerance: ±5%.

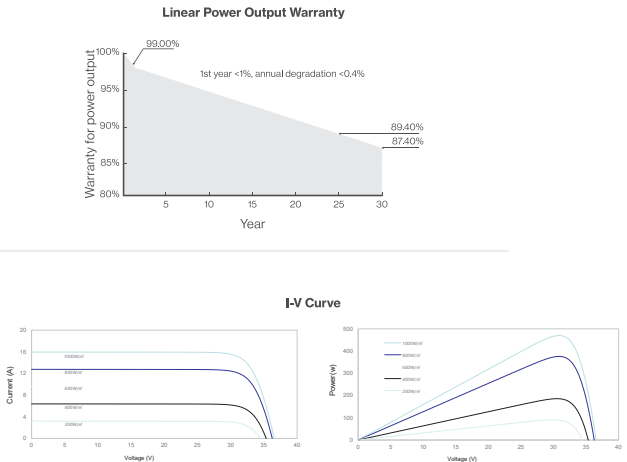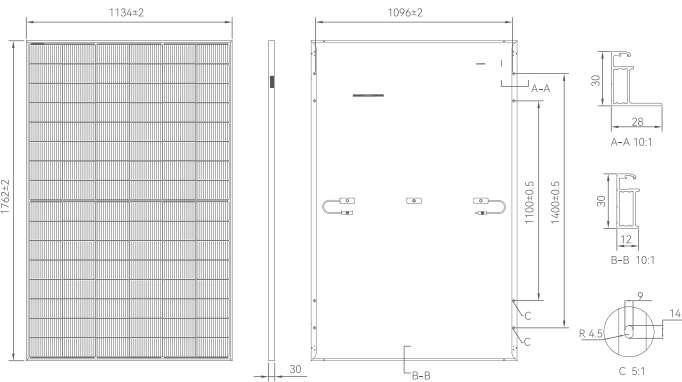

Statement: With technical progress and product updates, there exists a deviation between technical parameter of Rinnai's future products and the technical parameter in this specification. Rinnai reserves the right to adjust the technical parameter at any time without notifying the customers. Rinnai reserves the final right of interpretation. Made in China

Rinnai Australia Pty Ltd

ABN 74 005 138 769

82-88 Mills Road,
Braeside, Victoria 3195

For further information
call 1300 555 545 or visit
rinnai.com.au

TOTAL HOME COMFORT



HOT WATER



HEATING



COOLING

Rinnai