

DDWW50 - Warm water valve notes

- Peak flow rate

Min return flow rate

Max differential pressure between hot and cold

Power supply

Weight

Cold inlet

Hot inlet

Mixed outlet

Mixed return

Cold connection to heat source
- 267 l/min at 200 kPa

- 24 l/min

- 50 kPa

- AC 240 V 50 Hz

- 90 Kgs

- R2" (50mm)

- R1.1/4" (32mm)



- R2" (50mm)

- R1.1/4" (32mm)

- R1.1/4" (32mm)

DRAWING CHANGES

| REV | ECN NO | DESCRIPTION | BY | CKD | DATE |
|-----|--------|-------------|----|-----|------|
|     |        |             |    |     |      |

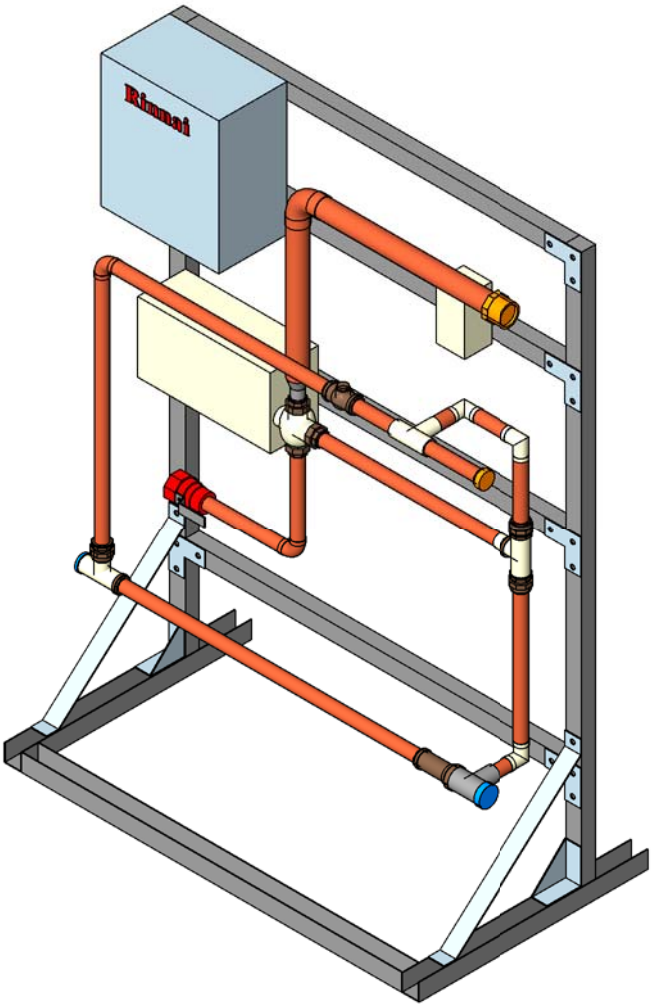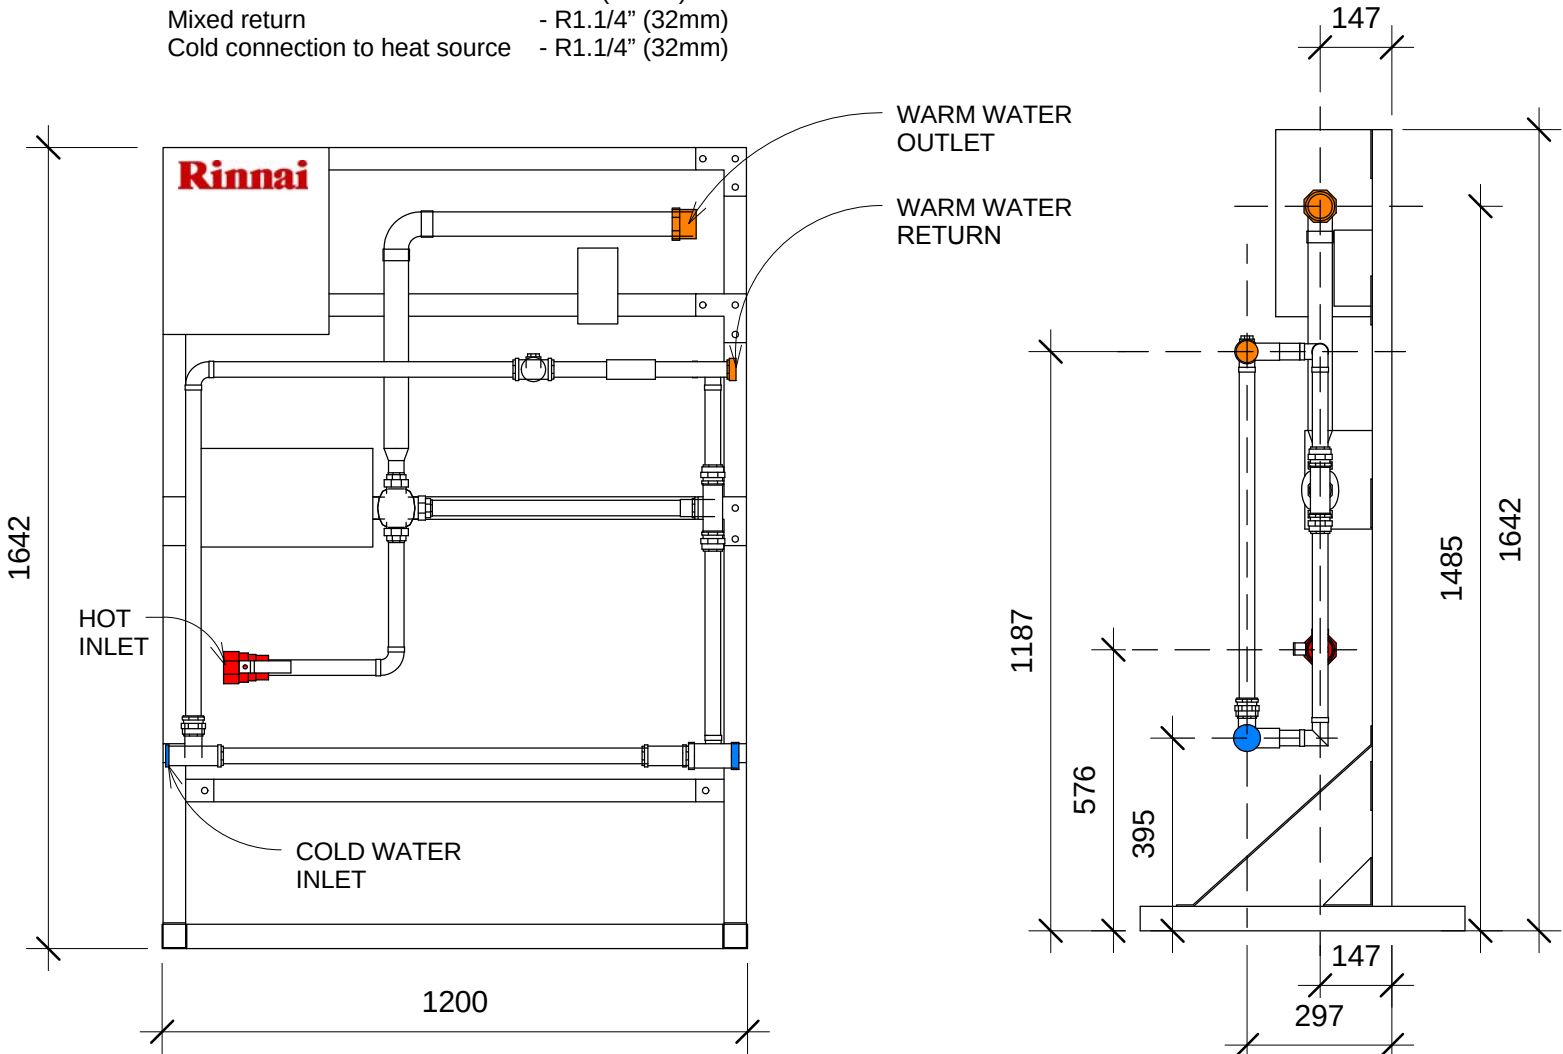

|                                                 |  |                      |          |                                 |                         |
|-------------------------------------------------|--|----------------------|----------|---------------------------------|-------------------------|
| MATERIAL                                        |  | DRAWN                | DAP      | <b>Rinnai Australia Pty Ltd</b> |                         |
| TOLERANCE - UNLESS STATED<br>0.±1.0<br>0.0 ±0.5 |  | DATE                 | 17/07/12 |                                 |                         |
|                                                 |  | CHECKED              | SVL      |                                 |                         |
|                                                 |  | APPROVED             |          |                                 |                         |
| FINISH:                                         |  | DO NOT SCALE DRAWING |          | Weight                          | Drawing Number(PART NO) |
|                                                 |  |                      |          | RA-17-07-12-003                 |                         |