

Rinnai

SK Series


520-535W Solar Panel



Features and Benefits

Designed for Australian Conditions

The Rinnai SK series is engineered for powerful, high-efficiency generation, using N-type bifacial technology to capture light from both sides of the module. This advanced design delivers exceptional total energy yield, lowering system LCOE and improving long-term project value. Built with strengthened dual-glass construction and certified for high wind and snow loads, the SK series is suited to a wide range of Australian residential and commercial applications where performance and durability are essential.

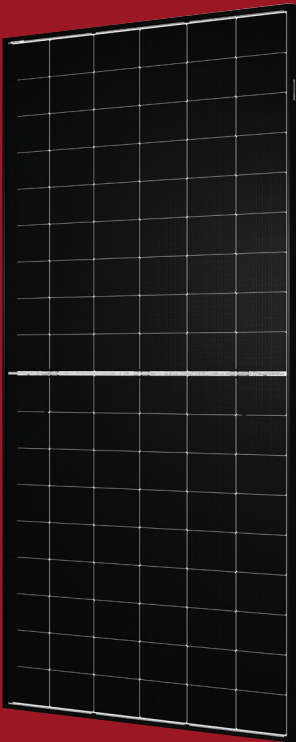

Built for Australian Conditions

Designed to withstand extreme wind and hail conditions, with rigorous cyclone and impact testing. Built with enhanced Salt Mist protection for lasting performance near coastal areas.



N-Type Technology

Next-generation cell technology delivers higher efficiency, strong low-light performance and reliable output in Australia's sunny climate.



Dual-Glass Strength

A robust 2.0 mm dual-glass design increases durability and moisture resistance, supporting consistent long-term performance in humid and coastal areas.




Positive Power Output

Every panel is guaranteed to meet or exceed its rated capacity, providing dependable real-world energy production.



Long-Term Assurance

Backed by a 25-year product warranty and a 30-year performance warranty for lasting confidence and efficiency.

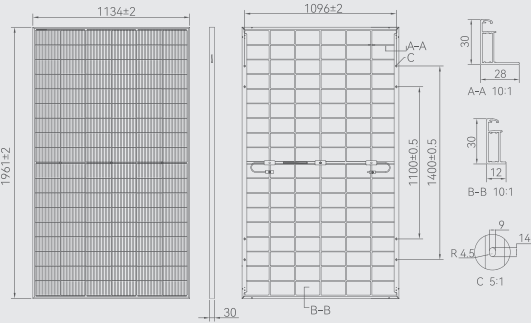


Technical Information


RINNAI - Module type			RINNAI-SK-520	RINNAI-SK-525	RINNAI-SK-530	RINNAI-SK-535	
Electrical Characters (STC) ^(A)	Maximum Power		Pmax (W)	520	525	530	535
	Open Circuit Voltage		Voc (V)	40.80	40.95	41.10	41.25
	Short Circuit Current		Isc (A)	16.05	16.12	16.20	16.28
	Voltage at Maximum Power		Vmp (V)	34.67	34.87	35.06	35.25
	Current at Maximum Power		Imp (A)	15.00	15.06	15.12	15.18
	Module Efficiency		(%)	23.38	23.61	23.83	24.06
Electrical Characters (BNPI) ^(B)	Maximum Power		Pmax (W)	574.1	579.9	585.2	590.8
	Open Circuit Voltage		Voc (V)	40.80	40.95	41.10	41.25
	Short Circuit Current		Isc (A)	17.72	17.80	17.88	17.97
	Voltage at Maximum Power		Vmp (V)	34.67	34.87	35.06	35.25
	Current at Maximum Power		Imp (A)	16.56	16.63	16.69	16.76
Electrical Characters (BSI) ^(C)	Short Circuit Current		Isc(A)	19.76	19.84	19.94	20.04
Electrical Characters with Different Rear Power Gain	5%	Maximum Power	Pmax (W)	546	551	557	562
	5%	Module Efficiency	(%)	24.55	24.79	25.03	25.26
	15%	Maximum Power	Pmax (W)	598	604	610	615
	15%	Module Efficiency	(%)	26.89	27.15	27.41	27.67
	25%	Maximum Power	Pmax (W)	650	656	663	669
	25%	Module Efficiency	(%)	29.23	29.51	29.79	30.07
Temperature Rating	Temperature Coefficient		Pmax (%/°C)	-0.28			
	Temperature Coefficient		Voc (%/°C)	-0.24			
	Temperature Coefficient		Isc (%/°C)	0.046			
	NMOT		°C	45±2			
Operating Parameters	Operating Temperature		°C	-40~+70			
	Maximum System Voltage			1500V DC			
	Maximum Series Fuse Rating		A	30			
	Power Selection Tolerance		%	0~+3			
	Bifaciality coefficient of Pmax		%	80±5			
	Bifaciality coefficient of Voc		%	98±5			
	Bifaciality coefficient of Isc		%	80±5			
	Fire Class Rating		-	Class C			
	T ₉₈		-	70°C			
Mechanical Parameters	Cell Type		-	N Type Monocrystalline Cell			
	Cell Orientation		-	108 (6x18)			
	Dimension (L × W × H)		mm	1961±2 × 1134±2 × 30			
	Weight		kg	27			
	Front Glass		-	2.0mm AR Coated heat strengthened glass			
	Rear Glass		-	2.0mm heat strengthened glass			
	Frame		-	Anodised aluminium alloy black frame			
	Junction Box		-	IP68, 3 Diodes			
	Cable		mm²	4			
	Cable Length		mm	1200			
	Connector		-	Stäubli - PV-KS(B) T4-EVO2A/xy			
	Test Load		Pa	-2400 / +5400			
	Per Pallet		-	36 Pieces			
	Packaging		-	864 Pieces per 40' HC			

^(A)STC: Irradiance 1000W/m², Cell Temperature 25 °C, Air Mass 1.5, Power Measurement Tolerance: ±3%, Voc and Isc Measurement Tolerance: ±5%. ^(B)BNPI: Front Side Irradiance 1000W/m², Back Side Irradiance 135W/m², Cell Temperature 25 °C, Air Mass 1.5, Power Measurement Tolerance: ±3%, Voc and Isc Measurement Tolerance: ±5%. ^(C)BSI Test condition: front irradiance 1000 W/m², rear irradiance 300 W/m²

Linear Power Output Warranty

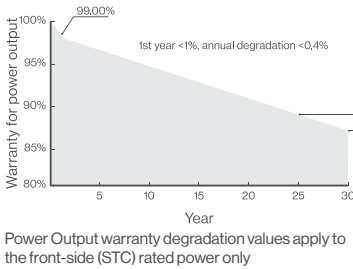

I-V Curve

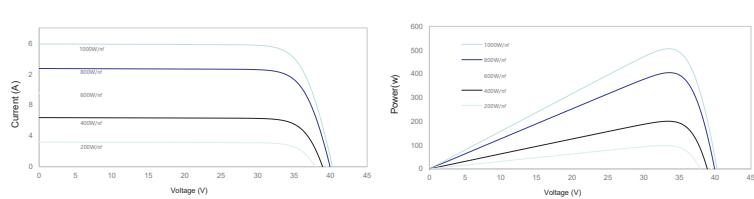

Statement: With technical progress and product updates, there exists a deviation between technical parameter of Rinnai's future products and the technical parameter in this specification. Rinnai reserves the right to adjust the technical parameter at any time without notifying the customers. Rinnai reserves the final right of interpretation. Made in China

Rinnai Australia Pty Ltd

ABN 74 005 138 769

82-88 Mills Road,
Braeside, Victoria 3195

For further information
call 1300 555 545 or visit
rinnai.com.au

TOTAL HOME COMFORT



HOT WATER



HEATING



COOLING

Rinnai