

Rinnai

Gas Clothes Dryers



Experience Our Innovation

Rinnai



Rinnai Dry-Soft® dryers combine large 4kg or 6kg capacities with the efficient heating power of gas. Consequently they produce less greenhouse emissions than conventional electric dryers, are far more powerful reducing cycle times and by using gas as the heat source rather than electricity, running cost savings are also enjoyed.

In addition to all the great environmental, time and running cost savings of the Dry-Soft, the quality of the dryness and softness of the clothes is also far superior. Gas heated air combined with inbuilt sensors ensures that clothes don't over-dry. This eliminates the build-up of static electricity and ensures that the clothes are not only soft, but reduces the majority of wrinkles and ultimately the amount of ironing required.



Wall Bracket

Easy-to-use

Electronic controls feature 5 individual Drying Programs and a Timer with an Auto-Stop function which senses the moisture content and automatically stops the cycle when the clothes are dry. This eliminates any over-drying and further saves on the running costs.

Delicate & Extra Soft cycles

In these programs the Dry-Soft gently dries at lower temperatures. The unit will stop the drum rotation and blow cool air so that clothes are extra soft, and reduce wrinkles from forming.

Timer with Auto-Stop feature

This can be set between 5 and 60 minutes on the Dry-Soft 4 and up to 80 minutes on the Dry-Soft 6. Inbuilt humidity sensors override the timer and automatically switch off the dryer when the clothes are sufficiently dry, increasing efficiency and avoiding over drying, to protect your clothes.



Air Inlet Filter



Lint Filter

Exhaust Duct

No moist air, lint or dust is discharged into the room, which can cause mould and pose safety risks. The exhaust duct also means the appliance is considerably quieter than conventional electric dryers.

Mounting Options

The Dry-Soft can be bench mounted or wall mounted with the use of an additional bracket. For convenience, the front door can be positioned on the left or right side to suit your location needs.






Electronic Control Panel



Reversible Front Door



When tested in an independent laboratory against a conventional electric dryer, the Rinnai Dry-Soft gas dryer proved it's superior performance.

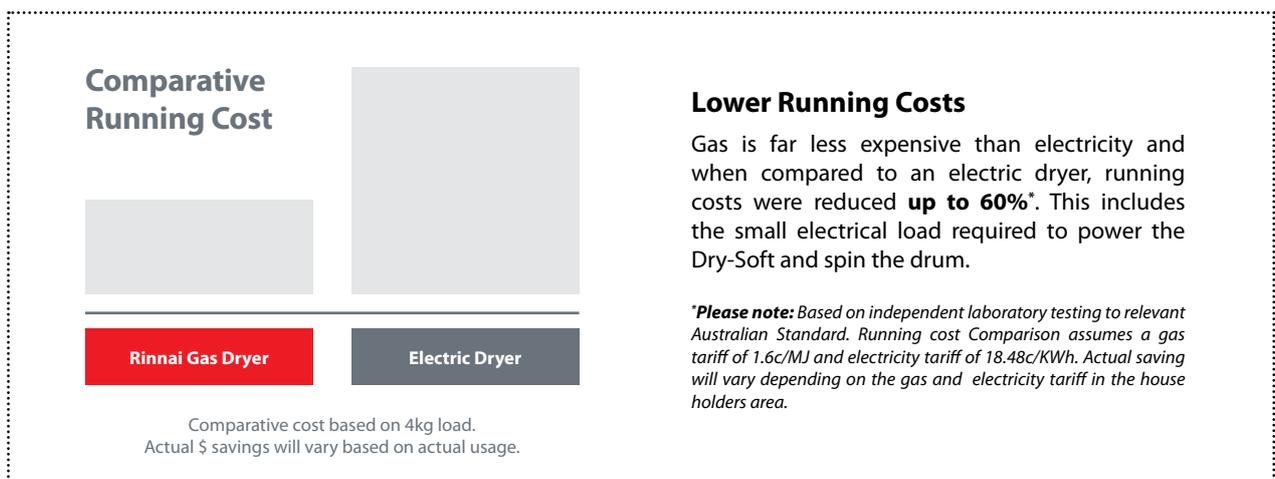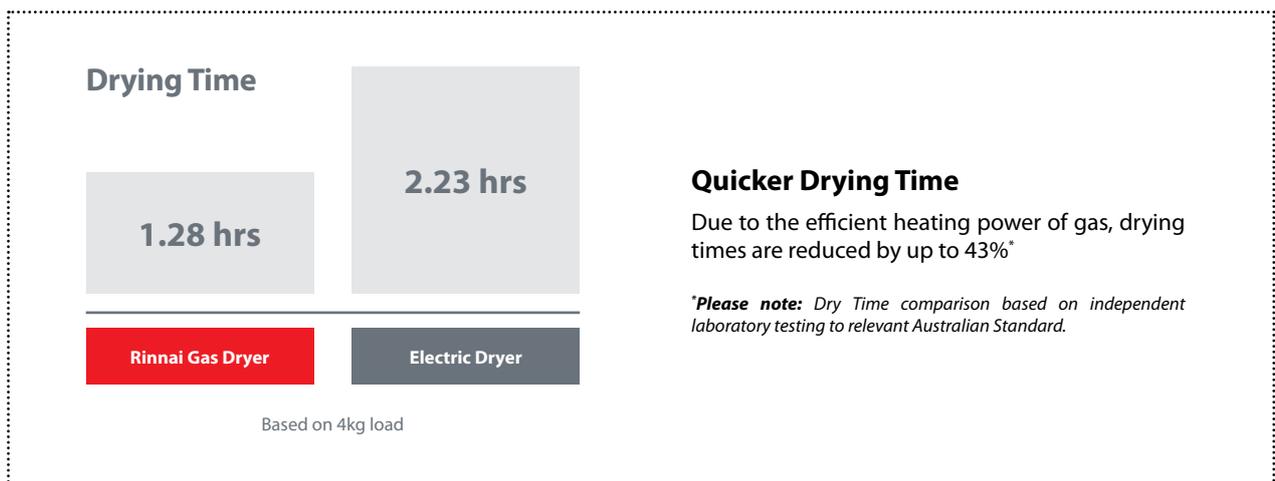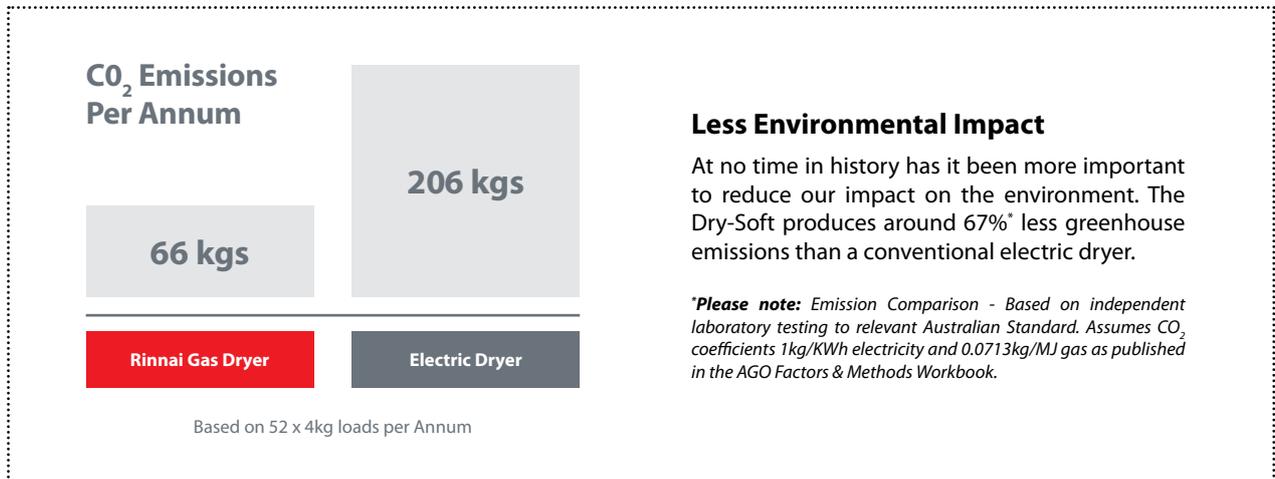

All of these benefits combined with our superior drying performance, show why the Rinnai Dry-Soft is the responsible choice.


Detailed Specifications

Model			
Order Code Nominate N or L after code for Natural Gas or LPG model		DRYSOFT4	DRYSOFT6
Standard Drying Capacity[†]		4 kg	6 kg
Dimensions (mm)	H	586	661
	W	550	650
	D	490	530
Weight (kg)		27	32.4
Drum Size (litres)		65	98
Standard Drying Time[†]		60 minutes	60 minutes
Clean Lint Filter Reminder LED		Yes	Yes
Noise Level dB(A)		49	49
Electrical Supply		AC 220-240V (50/60 Hz)	AC 220-240V (50/60 Hz)
Power Cord Length		1.5 metres	1.5 metres
Gas Consumption	Min	5.0 MJ/h	6.5 MJ/h
	Max	13.0 MJ/h	16.5 MJ/h
Gas Connection		300 mm flexible hose with 1/2" BSP (compression)	
Warranty		2 Years Parts & Labour In accordance with warranty terms & conditions supplied with the appliance.	

Exhaust Options

All Dry-Soft Models must be installed with a Rinnai exhaust kit (sold separately).

Description	Order Code
1 & 2 Horizontal Exhaust Kit	DSHKIT
3A Horizontal Exhaust Kit Duct Pipe 1000mm [#]	DSHKIT DSFPIPE1000
3B Vertical Exhaust Kit Duct Pipe 1000mm [#] 2 Sets of Bends (2 x 45°)	DSVKIT DSFPIPE1000 DSFBEND
3C Vertical Exhaust Kit Duct Pipe 1000mm [#] Bend (2 x 45°)	DSVKIT DSFPIPE1000 DSFBEND
3D Vertical Exhaust Kit Duct Pipe 1000mm [#]	DSVKIT DSFPIPE1000

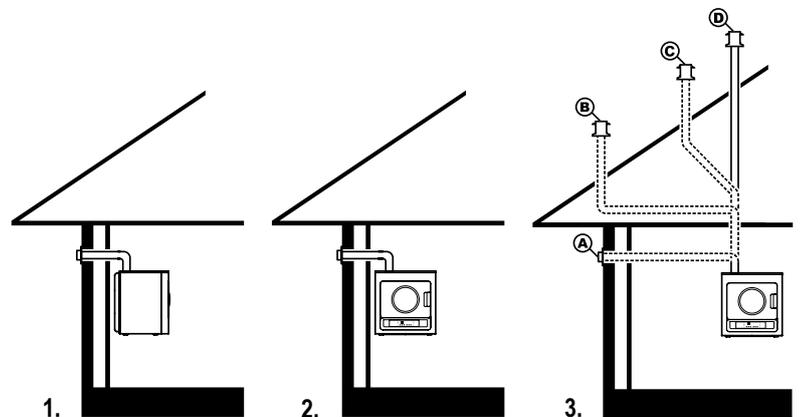

Bench or wall mounting

Different options for increased flexibility of location.

Description	Order Code
Dry-Soft 4 Bracket	DS4BKT
Dry-Soft 6 Bracket	DS6BKT



[#]Order lengths as required.

[†]Standard Drying Capacity and Drying Time is based on garments that have been through a washing machine spin cycle (Cotton: Synthetics = 50:50)

Please note: 240V power is required on all models. A power cord and plug is fitted. If hardwiring is required, consult a licensed electrician.

Dimensions are subject to production tolerances and may vary slightly from those given.

Rinnai Australia Pty. Ltd. reserves the right to make modifications and change specifications without notice.

At Rinnai Australia
we are committed to
ongoing innovation to deliver
efficient, well engineered
and designed products.

We aim to offer a superior
range of home appliances that
provide a clear insight into
what the future holds for
Australian homes.

The simple pleasures of
unlimited hot water, with
precise temperature control,
efficient and stylish heating
solutions and the superb
quality of a Rinnai Outdoor
Kitchen - all designed to
enhance your lifestyle with
the environment in mind.



RINNAI AUSTRALIA PTY. LTD

ABN 74 005 138 769

10-11 Walker Street Braeside VIC 3195

For further information visit

www.rinnai.com.au

or call 1300 555 545