


Rinnai

A woman is laughing joyfully while lying on a bed. She is wearing a black tank top and blue jeans. The bed has white sheets and a white headboard. In the background, there is a white sign with the text "SOMETIMES YOU NEED TO LET GO" and a green plant. The bottom half of the image is a red banner. On the red banner, there are three Rinnai Inverter Multi Split System components: a ceiling-mounted indoor unit, a wall-mounted indoor unit, and a floor-standing indoor unit. The ceiling-mounted unit is silver and rectangular. The wall-mounted unit is white and rectangular. The floor-standing unit is white and rectangular. The text "Rinnai" is visible on the wall-mounted and floor-standing units.

Inverter Multi Split System

The perfect multi-room solution

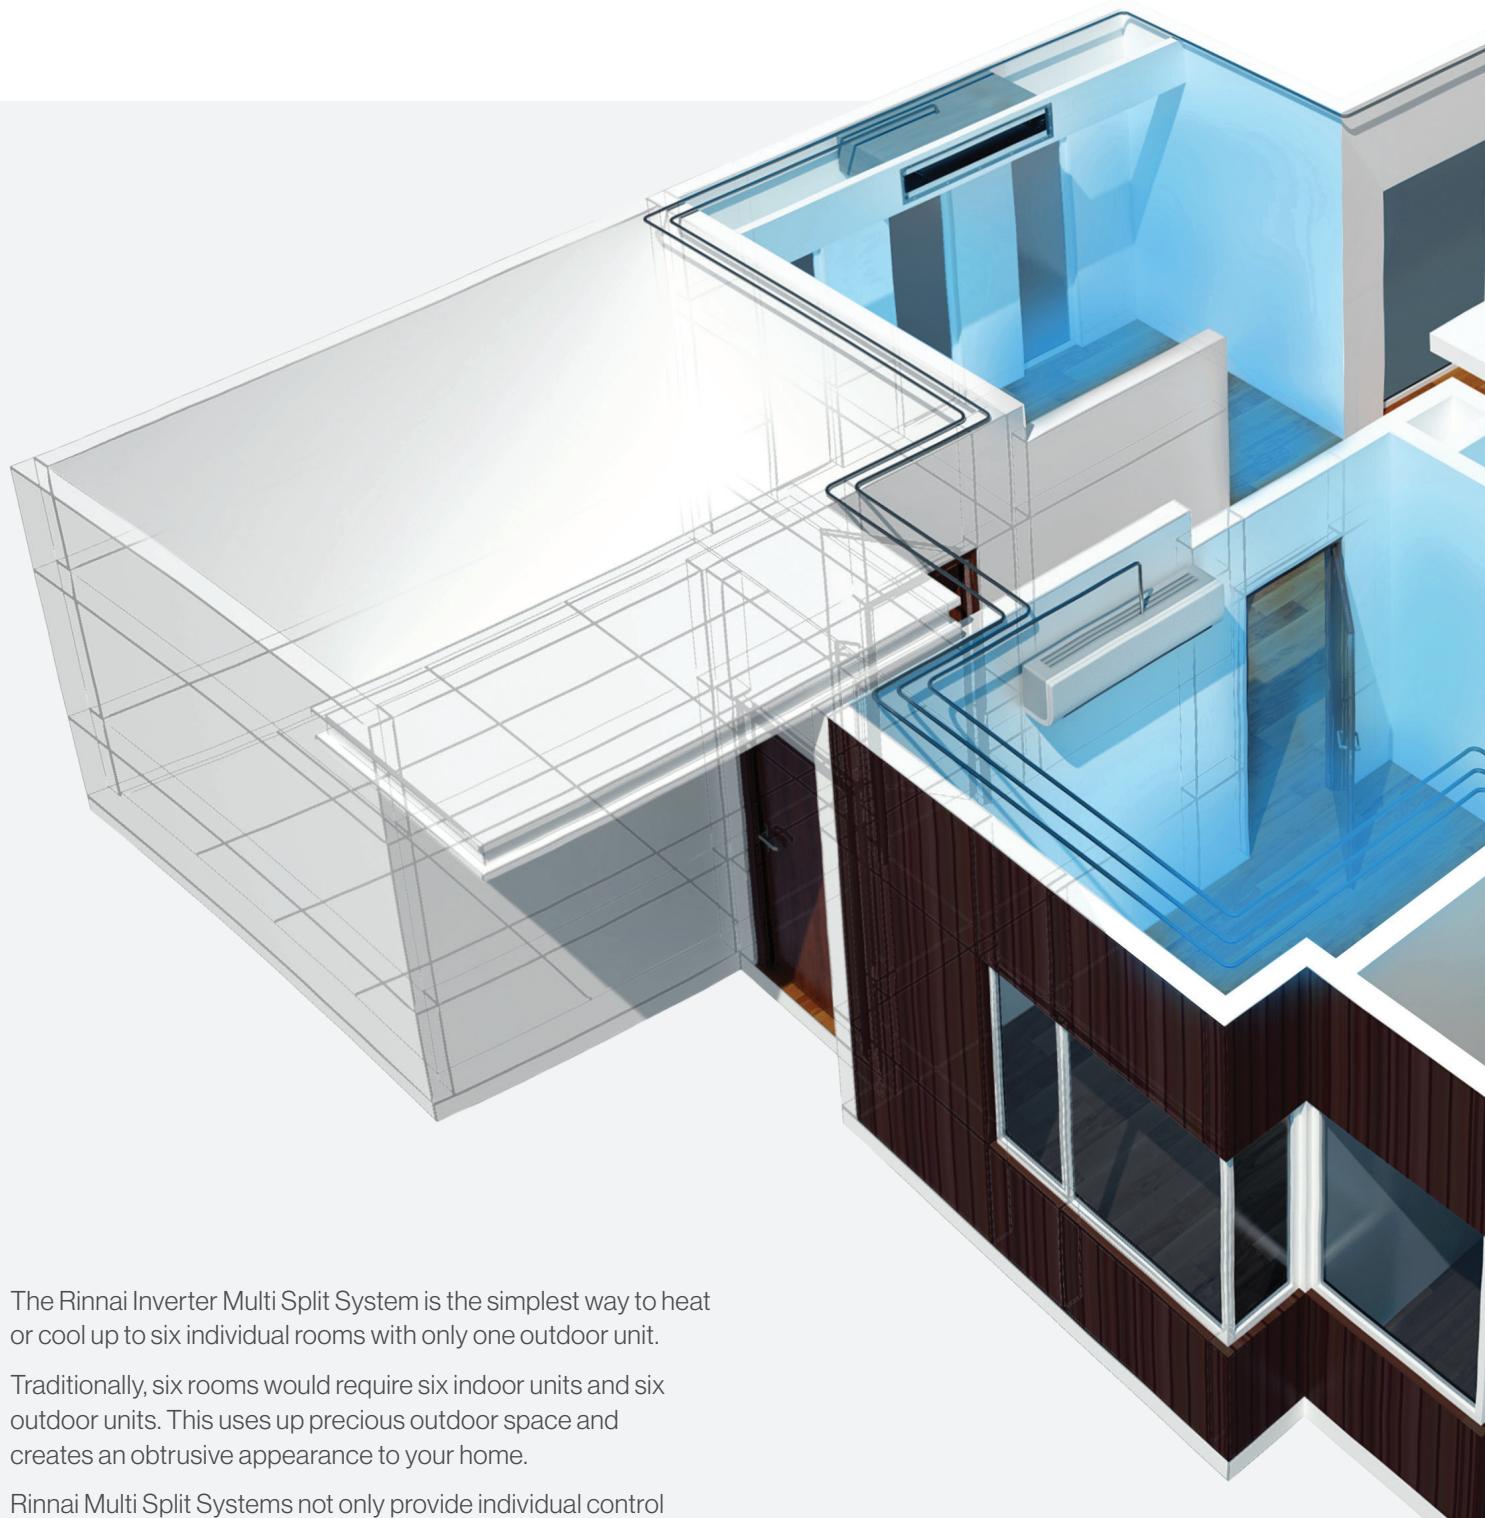

The Rinnai Inverter Multi Split System is the simplest way to heat or cool up to six individual rooms with only one outdoor unit.

Traditionally, six rooms would require six indoor units and six outdoor units. This uses up precious outdoor space and creates an obtrusive appearance to your home.

Rinnai Multi Split Systems not only provide individual control of comfort levels in each room, but saves you money on running costs by only heating or cooling individual rooms as required.



At Rinnai, we're all about comfort

For over 50 years, Rinnai has supplied Australian homes with a range of appliances that help people lead comfortable, safe and efficient lifestyles.

Being driven to create comfort means that we really care about our products and your experience from start to finish. We're focused on developing products with the latest technology and our level of quality is second-to-none, so you can rest assured knowing Rinnai will deliver.

We're at your service

The National Customer Care Centre provides first class service and maintenance of your system, ensuring it's running at its highest efficiency - so you can enjoy the Rinnai experience for many years to come.

Operating 5 days a week
(Monday to Friday)

13 43 73

Customised Comfort

Rinnai Inverter Multi Split Systems offer 4 different indoor unit types (Wall mounted, slim ducted, compact cassettes, and floor console) that can be used in a multitude of combinations. After selecting up to 6 indoor unit types, these are then paired with an outdoor unit (5 units to choose from) with capacities ranging from 7.1kW up to 18kW. With a variety of unit types and capacities available, Rinnai has a system configuration to suit virtually any requirement.

Seamless & Sleek

The sleek Rinnai Wall Mounted Split Systems feature the latest in innovation. Equipped with features including Turbo Function to quickly cool and heat the room, they discreetly operate thanks to a cleverly designed air tunnel for greater air distribution.

Come home to comfort with the Rinnai Mobile App allowing you to control your Wall Mounted Split System using Wi-Fi from anywhere with an internet or network connection.

Space-Saving Solutions

Compact & space saving in design, the Rinnai Slim Ducted and Compact Cassette indoor units are ideal for tight spaces.

Hidden away in a bulkhead or ceiling cavity, the Slim Ducted indoor unit operates quietly, so it is out of sight and out of mind.


Utilise the most of your ceiling space with the low profile Inverter Cassette, suitable for use in the larger open plan areas of the home with its 360° air flow.

Flexible & Functional

The Rinnai Floor Console offers efficient heating and cooling for any room, thanks to its dual outlets that ensure rapid temperature adjustments.

Installation is made easy with either wall-mounted or floor-standing options to fit your space perfectly.

Plus, with its convenient Wi-Fi control, you can easily set your perfect temperature from anywhere with an internet or network connection, using our Android or Apple app.

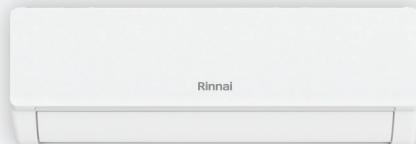

Wall Mounted Split System



Ceiling Inbuilt Slim Ducted



Ceiling Mounted Compact Cassette




Floor Console

Flexible Installation


One Rinnai outdoor unit can be connected to up to 6 indoor units which can be individually controlled. This installation option not only offers a great space-saving solution, but also helps to cut down overall running costs by allowing you to decide which rooms are heated or cooled as required.



Rinnai Multi Split System

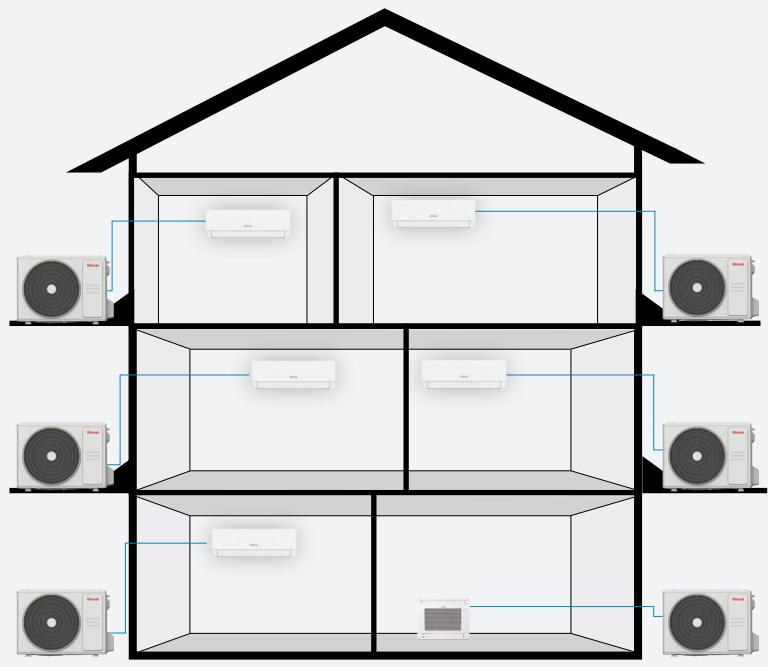

Single Split Systems

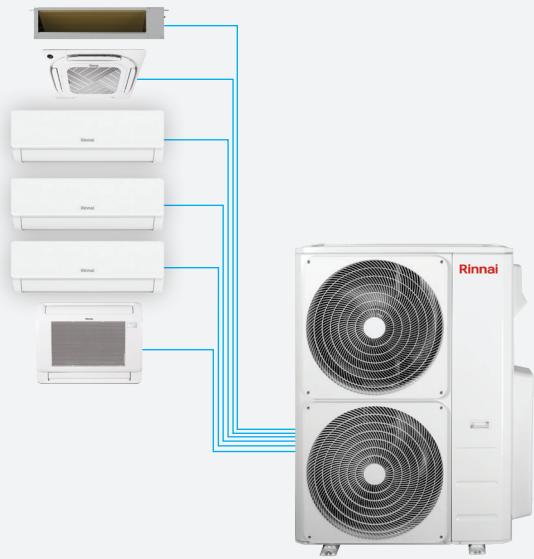

Features and Benefits



Smart 3D DC Inverter

A faster, more controlled warm-up or cool-down is achieved by the advanced inverter control systems. It combines three Direct Current (DC) motor technologies working in perfect unison to provide you with:

- Higher efficiency
- Synchronised performance
- Lower running costs in comparison to conventional air conditioners

DRED Enabled

This Demand Enabled Response (DRED) air conditioner allows your electricity provider to control the system at various pre-programmed levels, to manage your demand on the power grid during peak periods.



Wi-Fi Control



Set your favourite temperature from anywhere and come home to ultimate comfort with our intuitive Android or Apple App. Wi-Fi and App Control comes standard with all indoor units.



Next Gen Turbo+

Quickly cool in summer or swiftly warm in winter.
(Hi Wall PX Indoor Unit only)



Sleep Mode

Designed to control the temperature overnight to ensure high quality, comfortable sleep. Traditional sleep mode temperature control is one way; however our intelligent sleep mode system operates on two-way temperature control that modulates up and down to mimic outside ambient temperatures.



Auto Restart

Auto restart function in case of an electrical power outage provides you with complete peace of mind.



Healthier Indoor Air


Specialised biological enzyme + HEPA filter - Over 95% bacteria are killed and 99% dust of less than 0.3um is trapped, which achieves a combined effect of sterilization and dust elimination. (Hi Wall PX Indoor Unit only)




Timer

Designed to work around your lifestyle. Once set, the system will turn on and off at the specified times of the day, ensuring you wake up and come home to the perfect conditions.


Comfort at the touch of a button



Turn your Air Conditioner on or off, set your temperature, fan speed and more remotely from anywhere in the world with an Internet connection.



Your home's internet router relays requests from the App to control your Air Conditioner just like the normal remote controller.

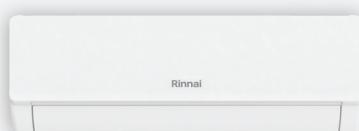

Set your favourite temperature before you come home - enjoy the comfort and energy savings.



Available to download via:

- Google Play
- App Store



Wi-Fi Control

The Rinnai Wall Mounted Split, Floor Console and Compact Cassette units feature inbuilt Wi-Fi control via the **NetHome Plus** App, with an optional Wi-Fi accessory available for the Slim Ducted units.

Simple to activate and easy to use, the App can be downloaded via Google Play or the App Store on a compatible mobile device. Once installed and registered, you can operate your appliance on the go.

Basic functions like on/off, temperature control and fan speed can be accessed through the App.

Voice Control

Take comfort to the next level through voice control via your Google Home and Amazon Alexa smart devices (Only on PX Series).

Technical Information



Outdoor Unit

Multi Outdoor Unit		MON2H05B1LA	MON3H07B1LA	MON4H09B1LA	MON5H11B1LA	MON5H13B1LA	MON6H19B1TA
Number of connected Indoor Units	Qty	2	3	4	5	5	6
Power Supply (To Outdoor Unit)	V-Ph-Hz			220-240-1-50			
Cooling	Rated Capacity (Range)	kW	5.4 (1.0-7.2)	7.2 (3.2-8.2)	9.0 (2.7-10.3)	11.6(2.6-15.1)	13.5 (2.6 ~ 15.1)
	Rated Input Power	kW	1.48	1.97	2.39	3128.00	3.91
	Rated Input Current	A	6.7	9.1	10.8	14.0	17.5
	AEER	W/W	3.58	3.58	3.70	3.643	3.40
Heating	Rated Capacity (Range)	kW	5.4(1.9-5.9)	7.3(2.1-8.8)	9.5 (2.8 ~ 10.3)	12.5 (2.6-16.3)	14 (2.6 ~ 16.3)
	Rated Input Power	W	1.32	1.61	2.32	2.78	3.26
	Rated Input Current	A	6.0	7.6	10.5	12.4	14.5
	ACOP	W/W	4.00	4.41	4.01	4.415	4.22
Maximum Input Current	A	12	17.5	19	30	30	33
Recommended Circuit Breaker	A	25	25	25	32	32	40
Compressor	Type	Inverter Rotary			Inverter Twin Rotary		
Sound Power Level	dB(A)	61	65	68	68	70	72
Dimensions	Net (W x D x H)	mm	805 x 330 x 554	890 x 342 x 673	946 x 410 x 810	980 x 451 x 975	980 x 451 x 975
	Gross (W x D x H)	mm	915x370x615	1030x438x815	1090x500x965	1145x500x1120	1145x500x1120
	Net / Gross Weight	kg	34.6/37.7	48.0/61.5	66.2/83.0	91.0 / 106.4	91.0 / 106.4
Refrigerant Type					R32		
Refrigerant Piping	Connection Size: Liquid Line	mm	2 x ϕ 6.35	3 x ϕ 6.35	4 x ϕ 6.35	5 x ϕ 6.35	5 x ϕ 6.35
	Connection Size: Gas	mm	2 x ϕ 9.52	3 x ϕ 9.52	3 x ϕ 9.52 + 1 x ϕ 12.7	3 x ϕ 9.52 + 2 x ϕ 12.7	3 x ϕ 9.52 + 2 x ϕ 12.7
	Maximum Total System Pipe Length	m	40	60	80	80	80
	Pre-Charged Length	m	20	30	40	50	50
	Maximum Length Per Indoor Unit	m	25	30	35	35	35
	Maximum Vertical Separation Outdoor Unit ABOVE Indoor Unit	m	15	15	15	15	15
	Maximum Vertical Separation Outdoor Unit BELOW Indoor Unit	m	15	15	15	15	15
	Maximum Height Difference Between Indoor Units	m	10	10	10	10	10
	Factory Precharge	g	1250	1850	2400	3600	3600
	Additional pre-charge	g/m			Liquid Side: ϕ 6.35 R32 (Total pipe length - The standard pipe length) \times 12g/m Liquid Side: ϕ 9.52 R32 (Total pipe length - The standard pipe length) \times 24g/m		
Ambient Temperature Limits	Cooling	°C			-15 - 50		
Ambient Temperature Limits	Heating	°C			-15 ~ 24		


Technical Information

Wall Mounted



Wall Mounted Split System			HINRPX20M	HINRPX25M	HINRPX35M	HINRPX50M	HINRPX60M	HINRPX70M	HINRPX80M
Power Supply		V-Ph-Hz	220-240-1-50						
Cooling	Rated Capacity	kW	2.00	2.6	3.5	5.0	6.0	7	7.95
	Rated Input Power	W	31	31	37	88	88	114	114
	Rated Input Current	A	0.31	0.31	0.37	0.7	0.7	0.88	0.88
Heating	Rated Capacity	kW	2.3	3.25	3.8	6.0	6.55	7.7	8.7
	Rated Input Power	W	31	31	37	88	88	114	114
	Rated Input Current	A	0.31	0.31	0.37	0.7	0.7	0.88	0.88
Air Flow (Turbo / Hi / Med / Lo / Min)			L/s	208/153 /111/86/43	208/153 /111/86/43	222/167 /125/103/61	339/256 /183/150/89	339/256 /183/150/89	336/289 /244/198/114
Sound Pressure Level @1m (Turbo / Hi / Med / Lo / Min)			dB(A)	47.0/38.0/33.0 /26.0/20.0	47/39/33 /26.5/20.5	46.5/39.5 /33.5/27/21	49.5/43.0 /36.5/28.5/19.5	49.5/43.0 /36.5/28.5/19.5	52/46/43 /38/37.5
Air Swing Louvres			Direction	4-way swing					
Dimensions	Net (W x D x H)	mm	813x201x289	813x201x289	813x201x289	975x218x308	975x218x308	1055x231x330	1055x231x330
	Gross (W x D x H)		885x280x358	885x280x358	885x280x358	1065x300x380	1065x300x380	1140x420x325	1140x420x325
	Net / Gross Weight	kg	8.0/10.4	8.0/10.7	8.2/10.8	10.7/14.8	10.7/14.8	13.0/16.1	13.0/16.1
Refrigeration Pipe Size: Liquid / Gas			mm	6.35mm /9.52mm	6.35mm /9.52mm	6.35mm /9.52mm	6.35mm /12.7mm	6.35mm /12.7mm	6.35mm /15.9mm
Controller			Type	Wireless Remote Control					
Operating Range	Cooling	°C	16-32						
	Heating	°C	0-30						
Wi-Fi Compatibility				Standard					

Slim Ducted



Slim Ducted			DINSD26MBA	DINSD35MBA	DINSD50MBA		
Power Supply			V-Ph-Hz	220-240-1-50			
Cooling	Rated Capacity	kW	2.60	3.50	5.28		
Heating	Rated Capacity	kW	2.90	3.80	6.00		
Rated Input Power			W	88	91		
Rated Input Current			A	0.66	0.67		
Airflow (Hi / Med / Lo)			L/s	172/150/125	183/158/131		
Maximum External Static Pressure (Hi)			Pa	100	100		
Sound Pressure (Hi / Med / Lo) @1.4m			dB(A)	35/33/31/27	35/33/31/26		
Dimensions	Net (W x D x H)	mm	700x450x200		700x450x200		
	Gross (W x D x H)		860x540x285		860x540x285		
	Net / Gross Weight	kg	16.6/19.8		16.6/19.8		
	Supply Air Duct Connection (W x H)	mm	537x152		537x152		
	Return Air Duct Connection (W x H)	mm	599x186		599x186		
Refrigeration Pipe Size: Liquid / Gas			mm	6.35/9.52	6.35/9.52		
Condensate Drain Pump Connection			mm	Φ25	Φ25		
Controller			Type	Wired controller			
Operating Range	Cooling	°C	16-32				
	Heating	°C	0-30				
Wi-Fi Compatibility				Standard			

Technical Information

Ducted



Slim Ducted			DINLR07B1A	DINLR09B1A	DINLR11B1A
Power Supply		V-Ph-Hz		220-240-1-50	
Cooling	Rated Capacity	kW	7.3	9.0	10.5
Heating	Rated Capacity	kW	7.5	10.5	12.5
Rated Input Power		W	145	280	302
Rated Input Current		A	1	1.72	1.83
Airflow (Hi / Med / Lo)		L/s	472/417/361/278/194	639/556/500/417/139	722/611/528/417/167
Maximum External Static Pressure (Hi)		Pa	160	160	200
Sound Pressure (Hi / Med / Lo) @1.4m		dB(A)	41/38/36/33/28	46/40/38/36/28	45/39/37.5/36/30
Dimensions	Net (W x D x H)	mm	1000x750x245	1200x750x245	1200x750x300
	Gross (W x D x H)	mm	1225x860x304	1425x860x304	1425x860x359
	Net / Gross Weight	kg	31.5/36.9	40.5/46.5	42.9/48.9
	Supply Air Duct Connection (W x H)	mm	827x178	1027x178	1027x233
	Return Air Duct Connection (W x H)	mm	892x212	1092x212	1092x267
	Refrigeration Pipe Size: Liquid / Gas	mm	9.52/15.9	9.52/15.9	9.52/15.9
Condensate Drain Pump Connection		mm	φ25	φ25	φ25
Controller		Type	Wired controller (Separate purchase)		
Operating Range	Cooling	°C	16-32		
	Heating	°C	0-30		
Wi-Fi Compatibility			Standard		

Technical Information



Compact Cassettes

Compact Cassettes			CIN020RMB	CIN026RMB	CIN035RMB	CIN050RMB
Fascia Panel		Model No.	CINFASMB			
Power supply		V-Ph-Z	220-240-1-50			
Cooling	Rated Capacity	kW	2.00	2.60	3.50	5.30
	Rated Input Power	W	25	25	40	45
	Rated Input Current	A	0.25	0.25	0.40	0.45
Heating	Rated Capacity	kW	2.30	2.90	3.50	5.50
	Rated Input Power	W	25	25	40	45
	Rated Input Current	A	0.25	0.25	0.40	0.45
Airflow (Hi/Med/Lo)		L/s	139/128/111	139/128/111	172/144/92	183/150/83
Sound Pressure Level @1.0m (Hi/Med/Lo)		dB(A)	40/37/27	40/37/27	42/38/31	44/41/31.5
Dimensions	Net - Body (W x D x H)	mm	570 x 570 x 245	570 x 570 x 245	570 x 570 x 245	570 x 570 x 245
	Gross - Body (W x D x H)	mm	715 x 640 x 295	715 x 640 x 295	715 x 640 x 295	715 x 640 x 295
	Net - Fascia (W x D x H)	mm	620x620x50			
	Gross - Fascia (W x D x H)	mm	715x700x115			
	Net / Gross Weight - Body	kg	14.6/17.5	14.6/17.5	14.6/17.5	14.6/17.5
	Net / Gross Weight - Fascia	kg	2.7/4.3			
	Refrigerant Pipe Size: Liquid / Gas	mm	6.35/9.52	6.35/9.52	6.35/9.52	6.35/12.7
	Condensate Drain Pump Connection	mm	φ25	φ25	φ25	φ25
Controller		Type	Remote controller			
Operating Range	Cooling	C	16-32			
	Heating	C	0-30			
Wi-Fi Compatibility			Standard			



Floor Console

Floor Console			FINRP50MB
Power supply		V-Ph-Hz	220-240-1-50
Cooling	Rated Capacity	kW	4.90
	Rated Power Input	W	80
	Rated Current	A	0.70
Heating	Rated Capacity	kW	5.50
	Rated Power Input	W	80
	Rated Current	A	0.70
Sound Power Level		dB(A)	54
Indoor unit	Dimension (W x D x H)	mm	794x200x621
	Packing (W x D x H)	mm	865x280x719
	Net/Gross Weight	kg	14.9/18.8
Controller		Type	Wireless Remote Controller
Wi-Fi Compatibility			Standard

Rinnai Australia Pty Ltd

ABN 74 005 138 769

100 Atlantic Drive,
Keysborough, Victoria 3173

For further information
call 1300 555 545 or visit
rinnai.com.au

TOTAL HOME COMFORT



HOT WATER



HEATING



COOLING

Rinnai